




**America's Choice for Boat Lifts**

(800) 242-0015

## PILING SETTINGS FOR 10K & 13K BEAMLESS

**TOP BEAMS: 9' 4" INSIDE-TO-INSIDE OF PILINGS**

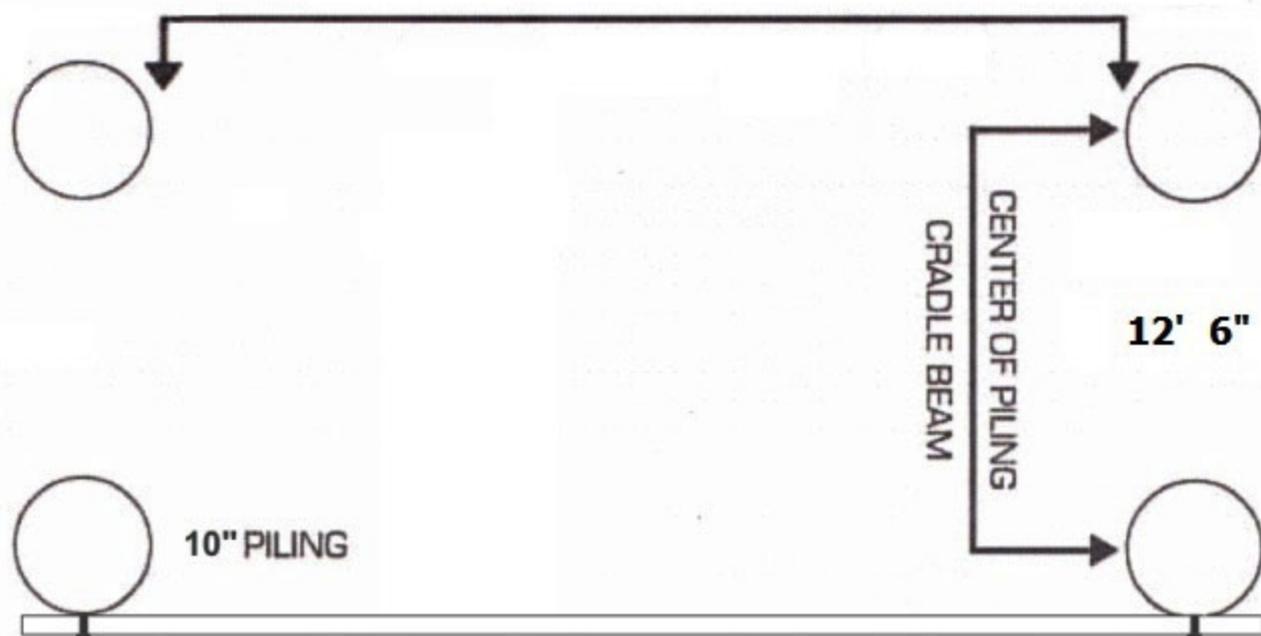

Note: Mount 2" x 12" just above waterline here.

**IMPORTANT:** Vessel weight must be balanced equally at each of the four lift cables. Move vessel forward/aft, and port/starboard as needed to achieve even weight distribution.