




America's Choice for Boat Lifts

PILING SETTINGS FOR 20K 24K 27K 6-PILE

TOP BEAMS: 15' 0" OUTSIDE-TO-OUTSIDE OF PILINGS

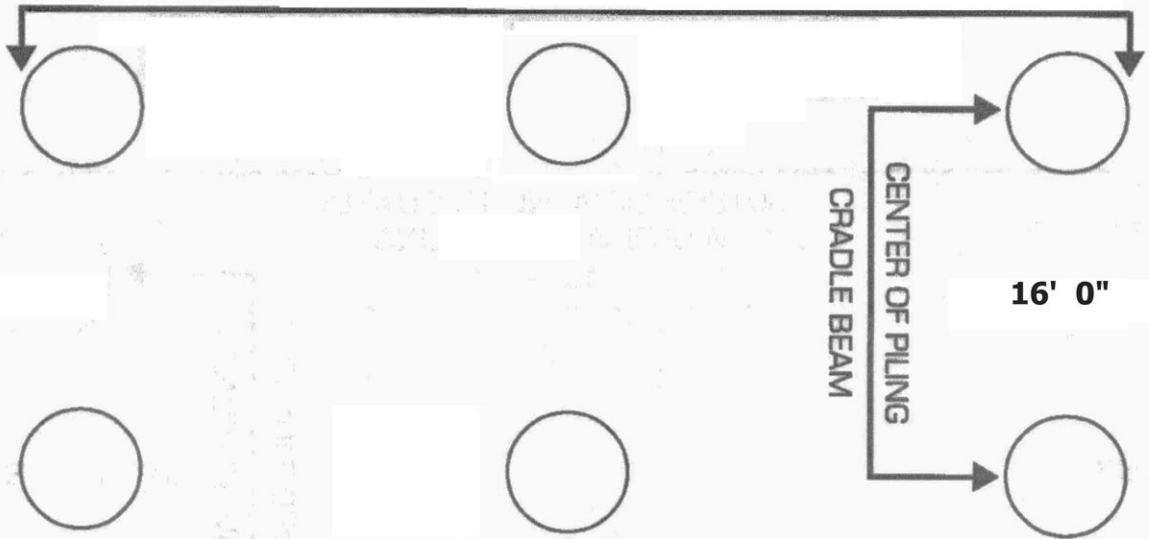

IMPORTANT: Vessel weight **MUST** be balanced equally at each of the four lift cables.
Move vessel forward/aft, and port to starboard as needed to achieve even weight distribution.