




# America's Choice for Boat Lifts


## PILING SETTINGS FOR 6K & 8K LIFTS

TOP BEAMS: 12' 6" OUTSIDE-TO-OUTSIDE OF PILINGS

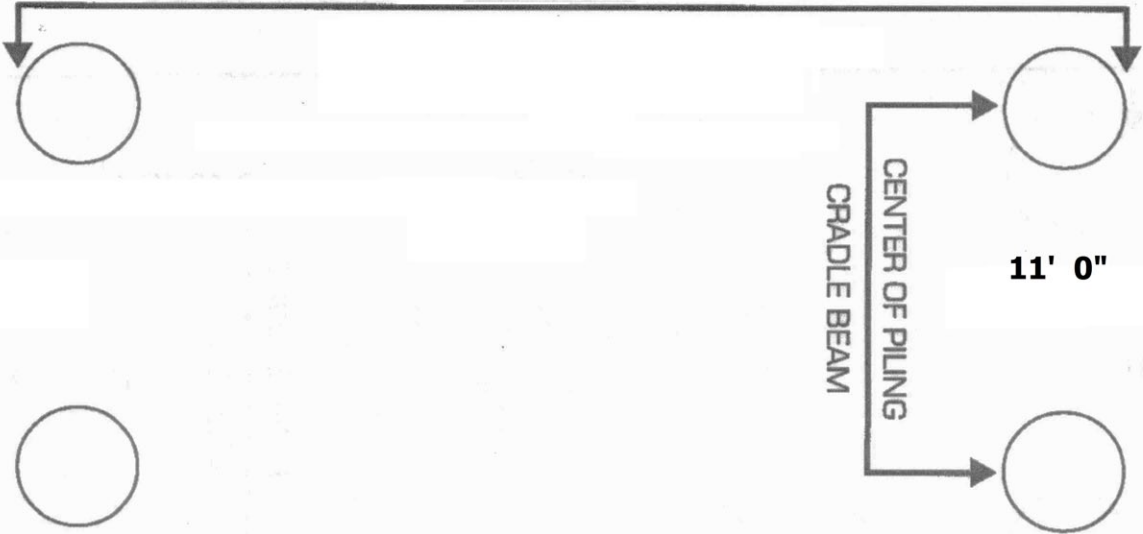

## PILING SETTINGS FOR 10K & 13K LIFTS

TOP BEAMS: 12' 6" OUTSIDE-TO-OUTSIDE OF PILINGS

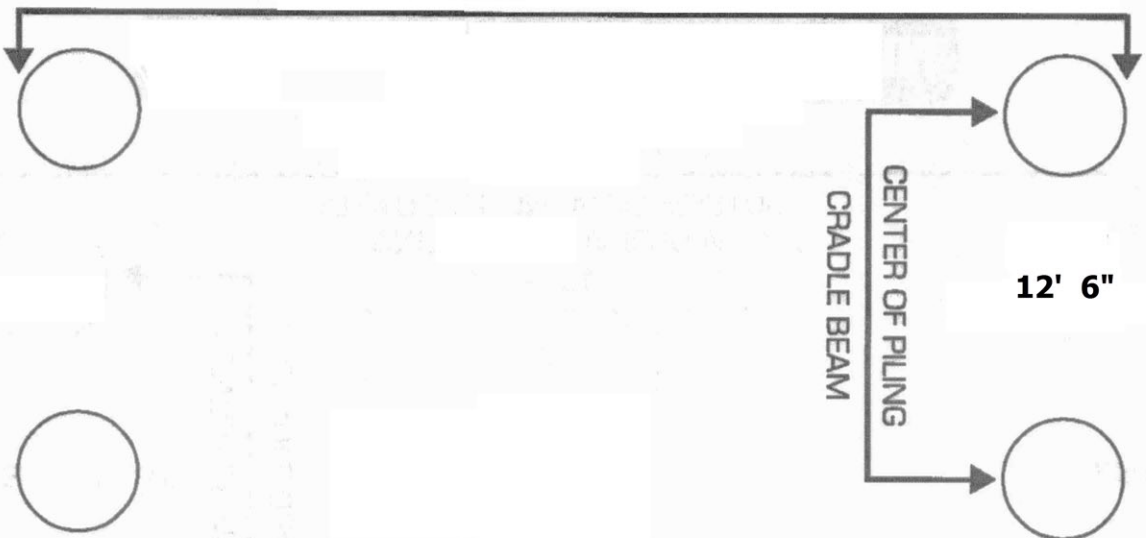

**IMPORTANT:** Vessel weight **MUST** be balanced equally at each of the four lift cables.  
Move vessel forward/aft, and port to starboard as needed to achieve even weight distribution.